



SIMU-Hz RADIO TRANSMITTERS

1 CHANNEL



THE NEW COLLECTION OF WIRELESS TRANSMITTERS TO EASILY CONTROL A ROLLER SHUTTER, AN AWNING OR LIGHTING

A transmitter for every use: choose either a wall version that can be placed where you want or a remote version that's always within easy reach!

The remote control: compact, ergonomic and practical, it fits easily in the hand and can also be hung up on the wall thanks to its magnetic bracket.


Elegant, both understated and modern, this new transmitter easily blends into any kind of decor.

A touch of comfort: record a favourite position on your roller shutter or awning and activate it by simply pressing the stop button.

 **SIMU-Hz**
technology

PROGRAMMING AND ASSEMBLY

Wall version

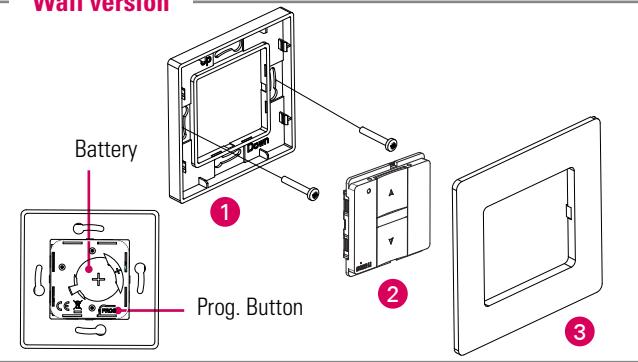


1 Mount the bracket on the wall

2 Clip on the Hz control module

3 Clip on the frame


Mobile version

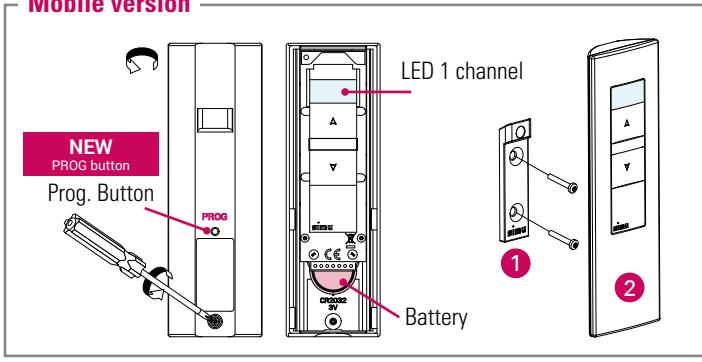

1 Mount the bracket on the wall

2 Put the Hz remote control in its wall bracket

TECHNICAL CHARACTERISTICS

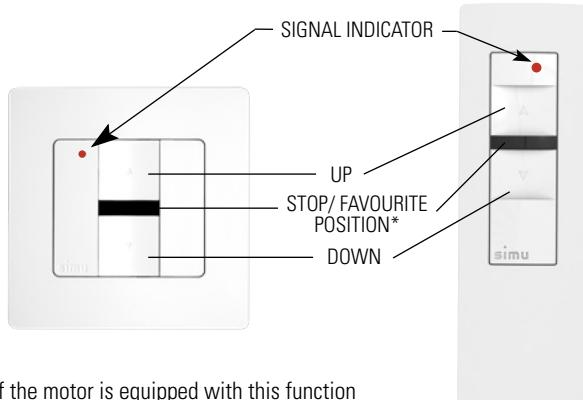

*If the motor is equipped with this function

POWER SUPPLY Pile lithium 3V type CR 2032

RADIO RANGE Wall version: 150 meters in open field and 15 meters through 2 reinforced concrete walls

Mobile version: 200 meters in open field and 20 meters through 2 reinforced concrete walls

SIZE Wall version: 80x80x10 mm

Mobile version: 125x40x15 mm

OPERATING TEMPERATURE 0°C / +45°C

RADIO FREQUENCY 433.42 MHz

PROTECTION INDEX IP30

PRODUCT CLASS III

COMPATIBILITY SIMU-Hz motors and receivers



REFERENCES

| DESCRIPTION | REFERENCES |
|-------------------------------|------------------------------|
| WALL Hz TRANSMITTER - 1C | x1 2008369 |
| | x10 2008370 |
| | x100 2008495 |
| MOBILE Hz REMOTE CONTROL - 1C | x1 2008799 |

Delivered with battery.

Mobile version supplied with wall bracket
(wall fixing screws not included in both cases).

